



FLOODPAK SERIES FPS




PRODUCT SPECIFICATIONS

- The FloodPak is a perfect blend of architectural design and performance.
- The FloodPak can be surface mounted in various positions. Use it as a cut-off wallpack or tip it up 22.5° for forward throw with semi-cut-off. Tip it up 45° for floodlighting, or turn it over and use it for indirect/accent lighting.
- The FloodPak can also be pole mounted or ground mounted using mounting accessories.
- Precision die cast aluminum construction. All exposed hardware is stainless steel.
- Duraplex II dark bronze polyester powder finish is standard but the FloodPak is available in a variety of designer colors.
- Hinged door frame with clear tempered glass lens.
- Multi-faceted reflection system provides uniform distribution.
- Injection molded triple finger silicone gasket.
- UL wet location listed for above or below horizontal aiming.
- Complete with a UL approved mounting box rated for 90°C supply wire with integral bubble level.
- Integral heat sink ensures cool operation.
- Meets IESNA Full cut-off requirements.
- Contractor Friendly design with integral cable permitting easy, hands free wiring.

ORDERING INFORMATION

CATALOG NUMBER:

Example: FPS150NLXL-1

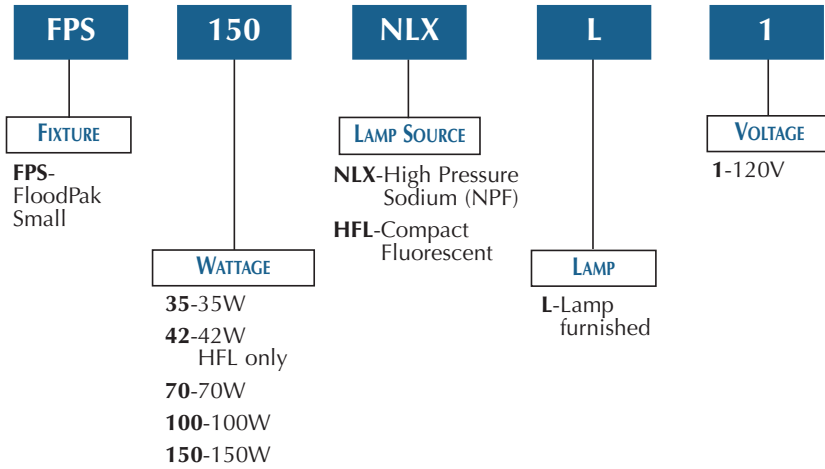

HID units supplied with clear medium base lamp.

ACCESSORIES

FPSKNUCKLE - 1/2" Adjustable Knuckle.

FPSARM - Shoebox Arm. Converts FloodPak to pole-mount (minimum 4" square pole).

FP2 - Single hole round cover for use with standard 4" round surface boxes.

FP4A - Single hole FS style cover for use on standard single gang FS boxes.

FP4B - Three hole FS style cover for use on standard single gang FS boxes.

FPS552 - Replacement lens for small size FloodPak.

FPSSHIELD - Vandal Shield. Helps protect lens and lamp from breakage. Clear polycarbonate shield snaps in place over glass lens. (For below horizontal only)



FPSKNUCKLE
Knuckle



FPSARM
Pole Arm



FPSSHIELD
Lens Shield



FPSRPA
Round Pole Adapter

TECHNICAL INFORMATION

EPA=0.67 sq. ft.

