


# GP Flood Series Floodlighting GP2 (Small)



## ORDERING INFORMATION

Catalog Number: Example: GP2A070PMAL-1

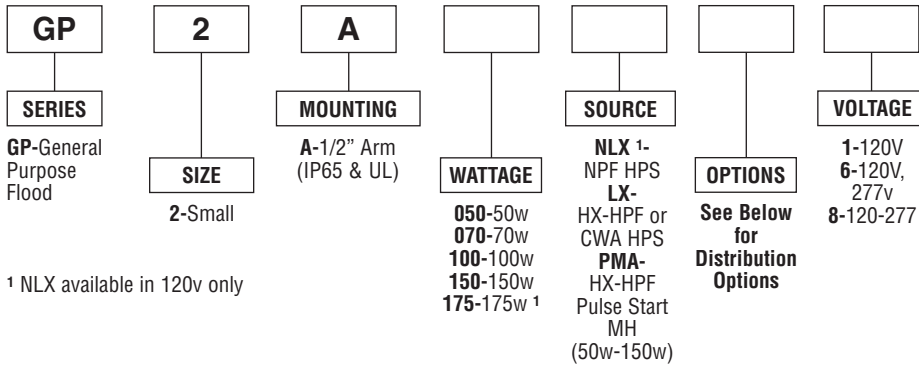

## PRODUCT SPECIFICATIONS

- The GP Flood combines architectural design with on-site versatility and is designed for general purpose floodlighting applications
- Applications include security, roadway, area, accent, facade, recreational fields, flagpole, and sign lighting
- Reflectors include general purpose, spot and cut-off optics for control of light trespass
- IP65 Rated for extra protection against water, dust and debris
- One piece die cast aluminum door with clear tempered glass lens is hinged to the die cast aluminum housing for easy maintenance
- Extruded silicone rubber gasket for long life
- Integral heat sink ensures cool operation
- ED17 lamps for pulse start metal halide and B17 lamps for high pressure sodium
- Lens screws are captive stainless steel fasteners
- Duraplex II dark bronze polyester powder finish is standard and also available in a variety of designer colors
- 1/2" arm with serrated teeth lock arm mount unit into position for walls and ground/flood mounting
- Unit can be aimed above or below horizontal
- Available with vandal shields, wire guards and glare shields
- Published 5-year limited warranty

## ACCESSORIES



- GP2GS** = Visor
- GP2WG** = Wire Guard
- GP2VS** = Vandal Shield

**SLW10P** = Wall mount adapter to convert GP2 style fixtures. Complete with built-in splice box and knock-out for button photo control

## OPTIONS

- L** = Lamped
- BLANK** = General Purpose Optics
- C** = Cutoff Optics
- S** = Spot


## TECHNICAL INFORMATION

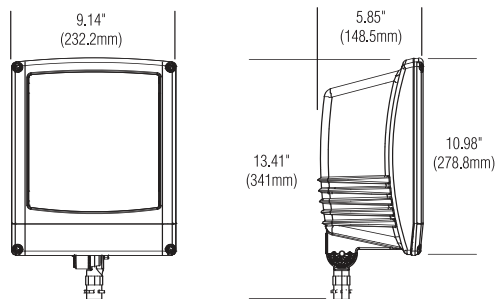


# 1-19

# GP Flood Series Floodlighting GP2 Small


## PHOTOMETRICS

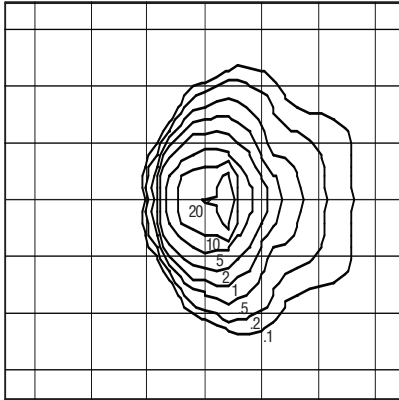

**GP2**  
Cutoff Optics  
175w Metal Halide  
Mounting Height: 15 ft. - Tilt: 30°  
Lumens: 14000  
NEMA: 6H x 5V

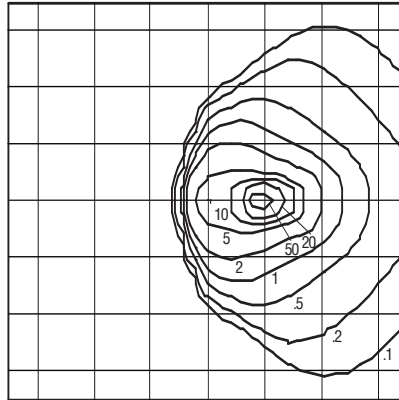

**GP2**  
Spot Optics  
175w Metal Halide  
Mounting Height: 15 ft. - Tilt: 45°  
Lumens: 14000  
NEMA: 2H x 3V

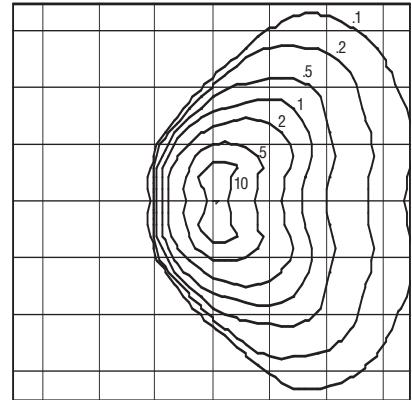

**GP2**  
General Purpose Optics  
175w Metal Halide  
Mounting Height: 15 ft. - 30°  
Lumens: 14000  
NEMA: 7H x 7V

### Conversion Data

| Mounting Height |      | Wattage |      |
|-----------------|------|---------|------|
| 10              | 2.25 | 50      | 0.24 |
| 12              | 1.56 | 70      | 0.4  |
| 15              | 1    | 100     | 0.61 |
| 20              | 0.56 | 150     | 0.96 |
|                 |      | 175     | 1    |